




**FATAFAT**  
Connected Networks

## Master Device with 10 Charging Points

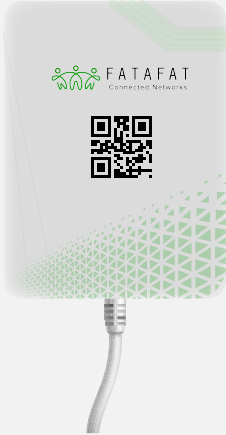

- ⚡ Keep a track of power Consumed Via Application
- ⚡ Physical Switch for manual Override and Troubleshooting
- ⚡ Pay Easily using Multiple Payment Methods



WiFi connectivity to provide Seamless Experience



Track the time taken for charging on FATAFAT App



Make your charger public, and earn for booking



Charging Start (or) Stop via Remote Connectivity



**Join the Biggest  
EV Charger Network**

### AC Nominal Input

Input Voltage	100-240V $\pm$ 10%
Input Current	32A Max.
Input Frequency	50Hz (or) 60Hz
Wires and Lines	1Phase + Neutral + PE
Input Power	7.2 kW

### AC Nominal Output

Output Voltage	220V $\pm$ 10%
Output Current	3.2A Max. Each Charging Point
Over Current Limit	35A
No. of Charging Points	10
Output Power	705W Each Charging Point

### General Specifications

Type	On/Off Switching Plug Unit with Power Consumption Measurement
Socket Type	Power Socket with Neutral, Live, and Protective Earth
Plug Type	India / US / Europe Compatible
Communication Standard	OCPP 1.6J (Upgradable to OCPP 2.0)
Protection & Safety	MCB Protected, Over Voltage, Under Voltage, Over Current, Surge Protection, Short Circuit, Over Temperature, Isolation Monitoring and Earth Leakage Current
Visual Indication	Presence of Input Supply, Error Indicators, State of Charge
Energy Meter	Inbuilt Energy Meter with 1% Accuracy
User Authentication	QR Scan/Smartphones/RFID
Chargeable Devices	EV Cars, E-Bikes, E-Rickshaws & Mobile Phones